

## MODEL 3




### Features

- Equipment mounted inside a secure tower operator
- Fast, simple installation – two conduit runs into operator and eight slotted bolt-holes for easy mounting
- Rated for continuous use up to 1,200 lbs solid gate panels
- Whisper quiet. No attachment to the ceiling or wall to further prevent noise or vibration into living spaces\*
- Flexible design for either track (**FLEXGUIDE™**) or trackless (**FLEXARM™**) installations
- **QUICKFOLD™** gates open fully out of drive aisle
- UL325 listed
- Made in the USA with USA steel
- Tested to over 1 million cycles
- 7 second **RAPID** option

\* An isolated bracket is recommended only for extreme-sized gates

# TORXUN MODEL 3

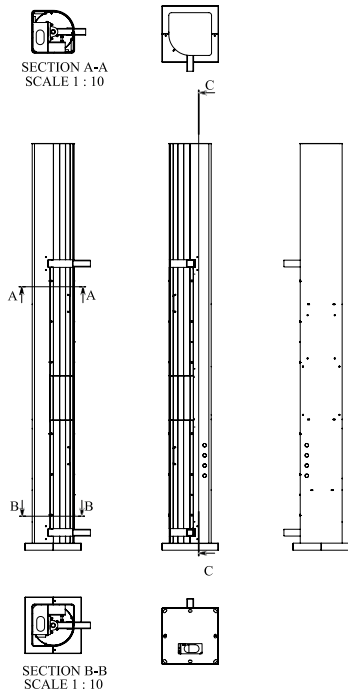

## Technical Data

	Data
Duty cycle	Continuous
Drive	1/3 HP DC motor
Gate swing	100°
90° Opening time	13 seconds 7 second RAPID option
Max gate weight	1,200 lbs
Max gate width	24 feet
Max gate height	15 feet
Power	110v, 20 amp 5-year limited warranty

Product	Part #
MODEL 3 8 foot tower	M308.0000
MODEL 3 10 foot tower	M310.0000
MODEL 3 custom height	M399.0000
Available Packages:	SecureMAX Harsh Environment Cold Environment RAPID (7 second)

## About TORXUN

TORXUN engineers architectural-grade products for vehicle access controlled systems. Everything is produced in Tracy, California.



50 Sloan Court, Tracy, CA 95304  
(888) 491-4283



Precision Handcrafted  
in Northern California  
from U.S. Steel.